



## ROOM THERMOSTATS, WITH FIXED DIFFERENTIAL, IP54

ET

### FUNCTION

Room temperature control in:

- single or two independent stage heating systems;
- single or two independent stage cooling systems;
- heating and cooling systems;
- minimum or maximum temperature security.

Models with setpoint adjustment by knob on or under the cover.

### APPLICATIONS

Well-suited for heating, cooling and air conditioning systems in strong polluted areas (dusty and damp) and in chemically aggressive atmosphere of industrial areas, commercial buildings and sport halls, storage room and garages, machine rooms, factories, greenhouses and agricultural installations.

TYPE	RANGE 1 °C	RANGE 2 °C	DIFFERENTIAL RANGE 1 K	DIFFERENTIAL RANGE 2 K	MAX. BULB TEMP. °C
ET060	0...+60		1,5±1		65
ET060U	0...+60		1,5±1		65
ET06060	0...+60	0...+60	1,5±1	1,5±1	65
ET06060U	0...+60	0...+60	1,5±1	1,5±1	65

U range 1 under the cover

Note: range 2 always under the cover

### TECHNICAL DATA

<b>Sensitive element:</b>	liquid-filled coiled copper nickel bulb
<b>Contacts:</b>	dust-tight microswitches with switching SPDT contacts (heat/cool)
<b>Switch capacity:</b>	NC 16 (6) A, 250 Vac NO 6 (4) A, 250 Vac
<b>Differential:</b>	fixed (see schedule)
<b>Working:</b>	-10...+65 °C 10...90% r.h. (without condensing)
<b>Storage:</b>	-20...+70 °C < 95% h.r.
<b>Housing:</b>	Bayblend base, ABS cover ABS (2 stage models)
<b>Protection:</b>	IP54, class I
<b>Size:</b>	108 x 70 x 72 mm 132 x 88 x 70 mm (2 stage model)
<b>Weight:</b>	340 g ... 520 g



**WIRING DIAGRAM**

**Heating**

Range 1: connect to terminal 2 and to terminal 3 (fig. 1 and fig. 2).  
 Range 2: connect to terminal 5 and to terminal 6 (fig. 2).  
 The contacts open during the temperature rising.

**Cooling**

Range 1: connect to terminal 1 and to terminal 2 (fig. 1 and fig. 2).  
 Range 2: connect to terminal 4 and to terminal 5 (fig. 2).  
 The contacts open during the temperature dropping.

The two stages are completely independent.

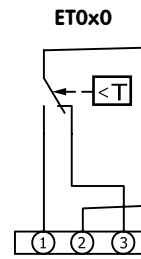


fig. 1

**ET0x0x0**


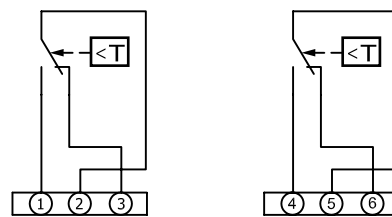


fig. 2

**Logic activation:**

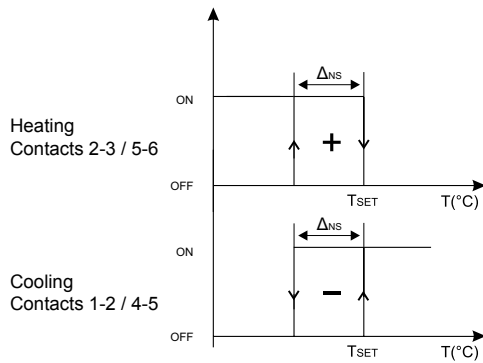

$\Delta_{NS}$ : differential in the stage  
 $T_{SET}$ : setting setpoint  
 ON: closed contact  
 OFF: open contact

**DIMENSIONS (mm)**

