



# SE18M24

Valve actuator for 0(2)...10 V control signal.  
Force 1800 N.

Valve actuator for control of AB Industrietechnik's valves.  
The actuator has automatic self stroke adjustment and can be operated manually.

- Protection class IP54
- Stroke 10...52 mm
- Manual operation

- Automatic stroke adjustment
- Easy to mount the valve
- Position indication

## Stroke and endpoint calibration

Stroke and endpoint calibration is not necessary due to a construction utilizing endpoint stops. When the valve reaches the endpoint, a force is generated. Once the force of the actuator reaches a predefined level, the limit switch automatically halts the drive motor.

## Override

Activation of the override input will force the valve to the maximum open position.

## Suitable valves

The actuator is intended for control of valves from AB Industrietechnik. Information on suitable valves can be found in the product information for each valve. AB Industrietechnik also offers adapters for adjusting the actuator to valves of other brands.

## Indications

The actuator has two LEDs with indications according to the table below.

Indication	
Green steady light	Actuator working properly
Green light quick flashing	Test run in progress
Green light slow flashing	The setting was changed during the operation. The new setting will be valid after the next power on.
Red and green steady light	Endpoint reached
Red light slow flashing	Override operating mode
Red steady light	Operation faulty, either the improper installation or the valve stroke lost

## \* Table valves VFSG

TYPE		CONNECTION	KVS m <sup>3</sup> /h	ACTUATORS MAX DIFF. PRESS. IN BAR (**)			
2 WAYS	3 WAYS			SE5	SE10	SE18	SE25
<b>VFSG232</b>	<b>VFSG332</b>	DN32	16	5 (5)	<b>5 (11)</b>	N/A	N/A
<b>VFSG240</b>	<b>VFSG340</b>	DN40	27	3,3 (3,3)	<b>5 (7)</b>	N/A	N/A
<b>VFSG250</b>	<b>VFSG350</b>	DN50	39	N/A	N/A	<b>5 (8)</b>	5 (12)
<b>VFSG265</b>	<b>VFSG365</b>	DN65	63	1,0 (1,0)*	2,3 (2,3)*	<b>4,4 (4,4)</b>	4,4 (6,3)
<b>VFSG280</b>	<b>VFSG380</b>	DN80	100	N/A	N/A	<b>3,4 (3,4)</b>	3,4 (4,5)
<b>VFSG2100</b>	<b>VFSG3100</b>	DN100	160	N/A	N/A	<b>2,1 (2,1)</b>	2,1 (3)
<b>VFSG2125</b>	<b>VFSG3125</b>	DN125	215	N/A	N/A	1,3 (1,3)	<b>1,7 (1,7)</b>
<b>VFSG2150</b>	<b>VFSG3150</b>	DN150	310	N/A	N/A	0,9 (0,9)	<b>1,2 (1,2)</b>

**red** Recommended actuator

**N/A** Not selectable because of valve stroke and plug design..

\* Actuator needs to be complemented with stem connection OVA-F3.

(\*\*) The values in the brackets are the max diff. pressures when the valve is fully closed and actuator is still able to open or close the valve with security. The values outside the brackets are the suggested max pressure drop (valve fully open).

## Technical data

Supply voltage	24 V AC $\pm 15\%$ , 50/60 Hz, or 24 V DC $\pm 15\%$
Control signal	0(2)...10 V DC or 4...20 mA. For 4...20 mA control signal, a 500 $\Omega$ resistor must be mounted parallel to the input signal, i.e. between terminals 2 and 3. SW2 should be in position 1 (On).
Power consumption	Max. 8 W
Stroke	10...52 mm
Stroke time	3 s/mm
Force	1800 N
Ambient temperature	0...50°C
Storage temperature	-40...+80°C
Ambient humidity	10...90 % RH
Protection class	IP54






**EMC emissions & immunity standards:** This product conforms to the requirements of the EMC Directive 2004/108/EC through product standards EN60730-1:2000 and EN60730-2-14:1997.

**RoHS:** This product conforms with the Directive 2011/65/EU of the European Parliament and of the Council.

## DIP switches

	1 (On)	0 (Off)
SW1	Spindle down when the valve is closed	Spindle up when the valve is closed (FS=factory setting)
SW2	Y = 2...10 V DC	Y = 0...10 V DC (FS)
SW3	Reverse operation	Direct operation (FS)
SW4	Y signal split in accordance with the setting of SW5	No split function (FS)
SW5	5(6)...10 V = 0...100%	0(2)...5(6) V = 0...100% (FS)

## Wiring and dimensions

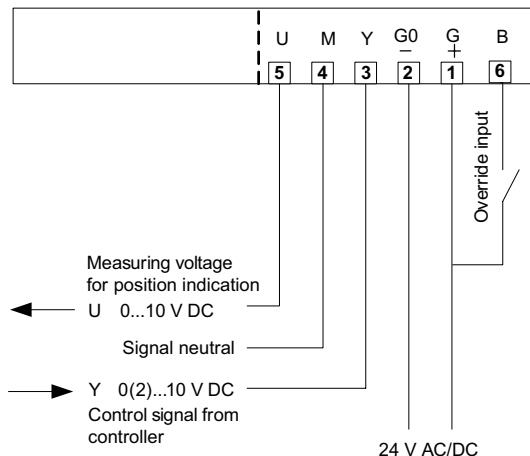

(mm)

## AB Industrietechnik Srl

Via Julius Durst, 70 - 39042 Bressanone (BZ) - Italy  
 Tel. +39 0472/830626 - Fax +39 0472/831840  
 www.industrietechnik.it - info@industrietechnik.it