




## DP

## DESCRIPCIÓN

Rejilla de chapa perforada, modelo DP.

Estructura de marco de aluminio y alma de chapa de acero perforada con acabado pintado blanco RAL9010.

Fijación mediante tornillos o clips.

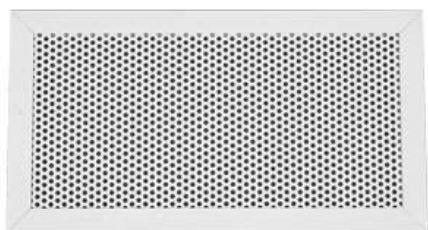

## BENEFICIOS

- Estética elegante.


## ACCESORIOS

- Anillo de montaje

## CARACTERÍSTICAS

DP		300X300	400X300	500X300	600X300	800X300	1000X300	400X400	500X400	600X400
Ak (m <sup>2</sup> )		0,0305	0,0422	0,0543	0,0668	0,0924	0,119	0,0584	0,0752	0,0924
Caudal (m <sup>3</sup> /h)	min	120	160	200	250	350	450	220	280	350
	max	260	360	460	560	780	1000	490	630	780
Lwa (db(a))	min	-	-	-	-	-	-	-	-	-
	max	21	22	23	23	25	26	23	24	25
Dpt (pa)	min	10	10	10	10	10	10	10	10	10
	max	50	50	50	50	50	50	50	50	50

## DIMENSIONES

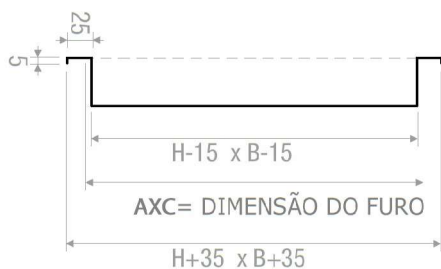

A - Altura

C - Longitud