

EVO REEL



In Line Fan

DESCRIPTION

Circular electric heater, EVO REEL model for hot air generation in ventilation systems.

Structure and terminal box in galvanized steel sheet, with heating elements in stainless steel. For connection to circular duct, equipped with seal to ensure airtightness. Equipped with 2 safety thermostats, a first level with automatic reset at 50°C and a second level with manual reset at 90°C.

Available in 6 sizes.

ADVANTAGES

- Installation in any position.
- High-quality structure.

ACCESSORIES

- Controller
- Duct / room temperature probe

HEATING ELEMENTS

ELECTRICAL HEATERS



The unit must be installed between ducts with an air filter upstream, ensuring a minimum air velocity of 1.5 m/s and a uniform air distribution. It allows installation in any position with duct connection via fitting.

CHARACTERISTICS

EVO REEL	100	125	150	150	150	200	250	315
Power (kW)	1,8	2,4	3,4	3,6	6	6	6	9
Power Supply (V F Hz)	230 1 50	230 1 50	230 1 50	400 3 50	400 3 50	400 3 50	400 3 50	400 3 50
Airflow (m³/h)	130	150	220	265	360	440	440	660
IMAX (A)	7,8	7,8	14,7	5,2	8,7	8,7	8,7	13,0



PERFORMANCE CURVES

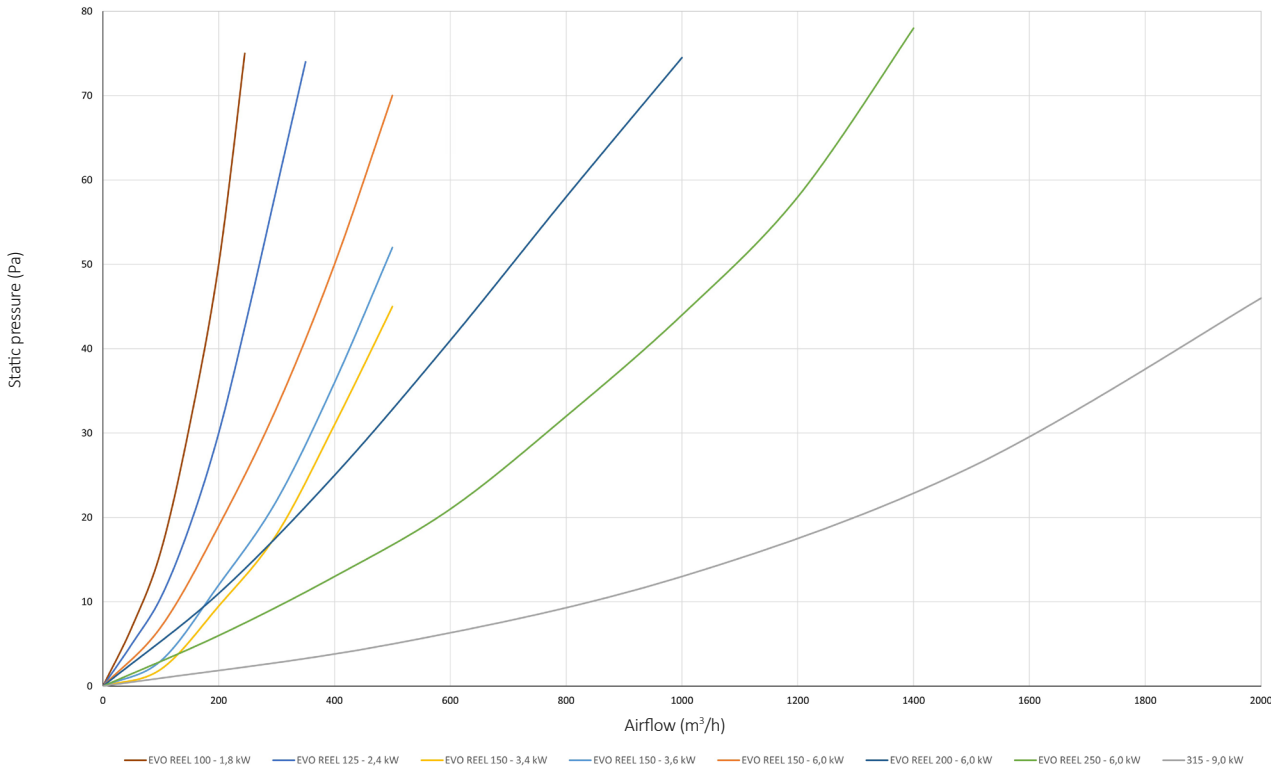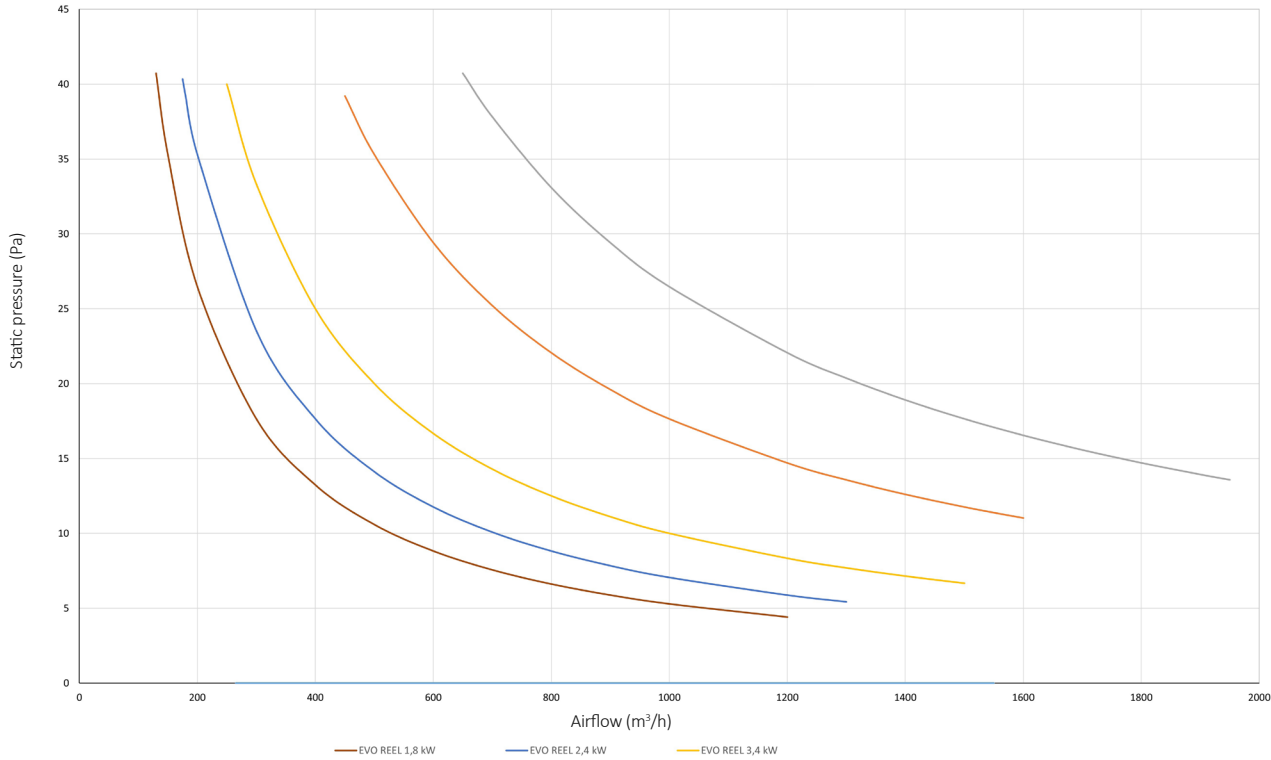

DIMENSIONS

EVO REEL	D100	D125	D150	D150	D150	D200	D250	D315
D ø (mm)	99	124	149	149	149	199	249	313
B (mm)	94	103	120	120	120	150	150	150
H (mm)	207	230	255	255	255	302	356	425
L (mm)	376	376	306	376	376	376	376	376
L1 (mm)	296	296	226	296	296	296	296	296
L2 (mm)	40	40	40	40	40	40	40	40
Weight (kg)	1,7	1,9	2,4	2,8	2,8	3,5	4,6	5,6

